

EUROPEAN PATENT APPLICATION

21 Application number: 85116302.2

51 Int. Cl.<sup>4</sup>: H 02 H 9/04, H 04 M 3/18

22 Date of filing: 20.12.85

30 Priority: 24.12.84 JP 272555/84  
08.12.85 JP 274727/85

43 Date of publication of application: 09.07.86  
Bulletin 86/28

84 Designated Contracting States: DE FR SE

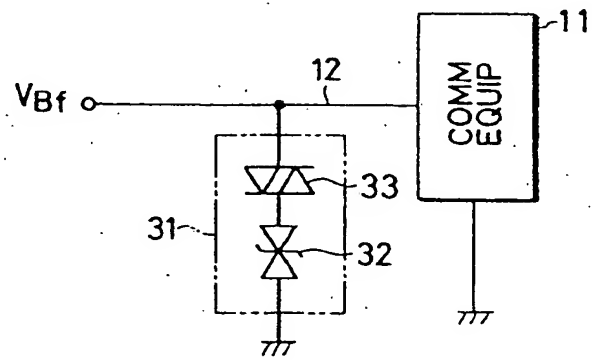
71 Applicant: Nippon Telegraph and Telephone Corporation, 1-8 Uchisaiwaicho 1-chome Chiyoda-ku, Tokyo (JP)

72 Inventor: Satoh, Hidetaka, 2-2416-1, Hanazono, Tokorozawa-shi Saitama (JP)  
Inventor: Kurosawa, Hideyuki, 3-2-19, Kinugakko, Hachioji-shi Tokyo (JP)  
Inventor: Kamijoh, Yoshiaki, 4107, Uenohara Uenohara-machi, Kiatsuru-gun Yamanashi (JP)  
Inventor: Jyumonji, Hiromichi, 4-105, 2-1-30, Fujimidal, Kunitachi-shi Tokyo (JP)

74 Representative: Blumbach Weser Bergen Kramer Zwirner Hoffmann Patentanwälte, Radeckestrasse 43, D-8000 München 60 (DE)

54 Protector circuit.

57 A series connection of a bidirectional voltage limiting element (32) and a two-terminal bidirectional thyristor (33) is connected between a signal line (12) connected to a communication equipment (11) and ground. Breakdown voltage  $V_B$  of the bidirectional voltage limiting element is set to be slightly higher than battery feed voltage  $V_{Bf}$  on the signal line. The sum of this breakdown voltage  $V_B$  and break-over voltage  $V_{BO}$  of the bidirectional thyristor is set to be lower than breakdown voltage  $V_R$  of the equipment and higher than non-operation voltage  $V_A$ .



EP 0 186 873 A2

## PROTECTOR CIRCUIT

BACKGROUND OF THE INVENTION

5 This invention relates to protector circuits for protecting communication equipments for analog or digital transmission systems from lightning surges applied to signal lines.

10 Protector circuit standards for digital transmission systems with a transmission speed of 200 kb/sec. are as follows.

\* Limit voltage (i.e., breakdown voltage of communication equipment)  $V_R$  is no higher than 320 V.

15 \* Battery feed voltage (i.e., voltage supplied from a telephone exchange to a subscriber's communication equipment)  $V_{Bf}$  is 30 V (between core line and ground).

20 \* Non-operation voltage (i.e., the sum of the 50/60 Hz induced voltage on commercial power line, crosstalk of telephone bell ringer voltage and battery feed voltage, at which non-operation voltage the protector circuit should not be operated)  $V_A$  is 100 V. In a protector circuit in an analog transmission system, the non-operation voltage is the ringer voltage of 120 V. And the protector circuit is designed such that it will not be operated at this ringer voltage of 120 V.

25 \* Electrostatic capacitance  $C$  is no higher than 250 pF. (Transmission loss standards specify that the signal line impedance with respect to ground should be 4 k $\Omega$  or above for the maximum frequency component of the transmitted signal.)

30 \* Surge current withstanding capability (i.e., current caused through protection circuit by application of a lightning surge waveform [10/1,000]  $\mu$ sec rising to a peak voltage in 10  $\mu$ sec. and exponentially falling to one half

the peak voltage in 1,000  $\mu$ sec)  $I_p$  is greater than 58A.

Fig. 1 shows a prior art protector circuit for switchboard analog circuits. The circuit comprises a series connection of resistor 14, fuse 15 and resistor 16 and another series connection of resistor 17, fuse 18 and resistor 19, these series connections being inserted in pair signal lines (i.e., subscriber's line) 12 and 13 connected to subscriber's communication equipment 11. Resistors 14 and 17 are grounded at the ends thereof opposite from switchboard 11 through a three-electrode gas-filled protector (discharge tube) 21. Resistors 16 and 19 are grounded at the both ends thereof through zinc oxide varistors 22 to 25.

When a lightning surge voltage is applied to signal line 12, discharge is caused in the three-electrode gas-filled protector 21 between signal line 12 and ground. Due to the resultant discharge light or ions, the other side of the discharge tube 21 between signal line 13 and ground is triggered to discharge. The voltage on signal lines 12 and 13 consequently becomes the arc voltage of discharge tube 21, which is 20 to 50 V, thus protecting equipment 11 from the lightning surge voltage.

The discharge trigger voltage and discharge delay time of the discharge tube, however, vary greatly, i.e., 300 to 800 V and 0.3 to 3.0  $\mu$ sec., depending on the input surge voltage rising time. In addition, the response time of the three-electrode gas-filled protector is large. Before the discharge of discharge tube 21 is initiated, the lightning surge voltage appears across varistors 22 to 25, so that communication equipment 11 is protected by the "on"-state voltage across varistors 22 to 25 until the sum of the "on"-state voltage across varistors 22 and 24 and voltage drop across resistors 14

and 17 is sufficiently increased to start discharge of three electrode gas-filled protector 21.

In the protector circuit shown in Fig. 1, it is necessary to make up for fluctuations of the discharge characteristics of three-electrode gas-filled protector 21. Also, it is necessary to solve problems due to the delay of discharge. To ensure necessary surge protection characteristics, varistors, resistors, etc. are used. The circuit, therefore, comprises a large number of components and inevitably has a large size. In addition, the varistors should withstand high surge voltage, leading to an extra electrostatic capacitance.

Fig. 2 shows another prior art protector circuit which is designed for digital transmission systems. This circuit uses, in lieu of varistors, series connections of a plurality of bilateral voltage limiting elements 26, e.g., bilateral zener diodes (avalanche diodes) are used. In order to reduce capacitance, the series connection of bilateral voltage limiting elements 26 is fabricated as a lamination. The lamination has a large number of layers and requires a complicated manufacturing process.

Meanwhile, a varistor has a low voltage non-linearity index. Therefore, even if a multi-stage surge protection circuit is employed (e.g., three-stage in the case of Fig. 1), the communication equipment 11 should be designed to have a high breakdown voltage to cover variation in limiting voltage of the varistor.

While the protector circuits shown in Figs. 1 and 2 are actually used, there has been proposed a protector circuit, which does not use any lightning tube but uses thyristors, as shown in Fig. 3. This circuit is disclosed in U. S. patent No. 4,322,767 (filed on February 11, 1980) entitled "Bidirectional Solid-State Protector Circuitry

Using Gated Diode Switches". In this protector circuit, upon application of a positive lightning surge voltage to point A, the voltage at point 1200 is clamped by zener diode Z2 to a fixed voltage. At this time, zener diode Z3 is  
5 turned on so that the lightning surge voltage is applied to point 1800. The voltage at point 1800 thus exceeds the voltage at point 1200 to cause current to the gate of unidirectional thyristor GD SA, thus turning on the thyristor GD SA. When the applied lightning surge voltage is reduced,  
10 zener diode Z3 is turned off to turn off thyristor GD SA. Zener diodes Z1 and Z4 and thyristor GD SB are provided for negative lightning surge voltages.

This protector circuit has a voltage detector, the output of which is fed to the gate of the thyristor to  
15 turn on the thyristor. The voltage detector includes a large number of components and has a complicated construction. In addition, zener diodes Z3 and Z4 can not be constructed as a single element. Fig. 3 shows only a portion of the circuit that is connected to signal line 12  
20 shown in Fig. 1, that is, it is necessary to connect the same circuit to signal line 13. Further, zener diodes Z3 and Z4 are necessary for controlling the thyristor gate, and their breakdown voltage can not be determined in relation to the battery feed voltage on the signal line.

Fig. 4 shows another prior art protector circuit disclosed in U. S. patent No. 4,282,555 (filed on August  
25 13, 1979) entitled "Overvoltage Protection Means for Protecting Low Power Semiconductor Components". When the voltage on signal line A exceeds the sum of forward "on"  
30 voltage of diode D1 and break-over voltage  $V_{B0}$  of unidirectional thyristor T3 as a result of application of a positive lightning surge voltage, diode D1 and thyristor T3 are turned on. When the lightning surge voltage is

reduced so that the surge current becomes lower than holding current  $I_H$  of unidirectional thyristor T3, thyristor T3 is turned off. When a negative lightning surge voltage is applied to signal line A, diode D3 and  
5 thyristor T1 are turned on.

Where the current versus voltage characteristic of power supplied to the communication equipment via signal lines is as shown by line 27 in Fig. 5, holding current  $I_H$  of thyristors T1 and T3 should be above maximum  
10 current  $I_m$ . In order to attain a large holding current  $I_H$ , conventional surge protector circuit employs thyristors of an emitter short-circuited structure, resulting in increased chip areas therefor. In addition, break-over voltage  $V_{B0}$  of thyristor is set to be higher than non-  
15 operation voltage  $V_A$  lest the thyristor should turn on at non-operation voltage  $V_A$ . Therefore, the current versus voltage characteristic of the thyristor has been set as shown by curve 28. The thyristor thus momentarily consumes  
20 a high power of  $V_{B0} \times I_H$  (shown shaded in the Figure) when it is turned on. To increase the surge withstanding capability, therefore, the thyristor has been designed to have a large chip area. In this manner, the conventional surge protector circuit must use thyristors of increased  
25 chip areas, thus increasing capacitance to deteriorate the signal transmission characteristics of the signal lines. This method, therefore, is not suited for high speed transmission systems. Further, heating of the thyristor due to lightning surge current therein reduces its holding current as shown by dashed line 29. Until the thyristor  
30 temperature is lowered to cause the holding current to exceed the supply current, the thyristor is held in ON-state, while the supply current flows therethrough, disabling the communication equipment. That is,

communication remains interrupted until the holding current becomes higher than the supply current as a thyristor temperature falls again. For example, when the holding current of the thyristor which is 150 mA at normal temperature is reduced to 0 due to a rise of the thyristor peak temperature to 250 to 300°C caused by a lightning surge, the thyristor temperature should become lower than 100°C to regain a holding current in excess of the supply current of 120 mA. This takes a time period of at least 10 msec. During this period of at least 10 msec., the communication is held interrupted. To obtain quick thyristor temperature fall, it is necessary to use a double heatsink diode structure of silver, a good heat conductor, leading to a high price.

In the protector circuits shown in Figs. 3 and 4, an independently operable protector circuit is connected to each signal line. Therefore, when a lightning surge is applied with phase differences to a plurality of signal lines leading from a communication equipment or when there are fluctuations of the timing of start of operation of the protection circuits connected to the individual signal lines, a large transverse mode voltage is liable to be produced between signal lines through the communication equipment connected therebetween. Such a transverse mode voltage will cause rupture of the communication equipment.

French patent No. 2,498,387 discloses a further protector circuit. In this circuit, a voltage detector is used to detect a surge voltage, and the detector output is used to simultaneously control the gates of bidirectional thyristors connected between the pair signal lines and ground, respectively, to simultaneously turn on the two thyristors. The transverse mode voltage noted above, therefore, is not generated in this case. However, the

voltage detector for detecting the surge voltage is complicated. In addition, a delay is involved in the surge detection. Therefore, a grounded bidirectional voltage limiting element is connected between each signal  
5 line and ground to provide protection against surges until the thyristor is turned on.

#### SUMMARY OF THE INVENTION

Therefore, an object of the invention is to  
10 provide a protector circuit having a short response time.

Another object of the invention is to provide a protector circuit, which has less components and has a simpler construction so that it can be constructed in a small size, while also being applicable to high speed  
15 transmission systems.

Another object of the invention is to provide a protector circuit, which has less components and a simpler construction and can prevent generation of a transverse mode voltage across an equipment having a plurality of  
20 signal lines.

According to one feature of the invention, a series connection of a bidirectional voltage limiting element and a two-terminal bidirectional thyristor, is inserted between a signal line connected to a communication  
25 equipment and ground. Breakdown voltage  $V_B$  of the bidirectional voltage limiting element is set to be slightly higher than battery feed voltage  $V_{Bf}$  on signal line. Sum ( $V_B + V_{B0}$ ) of breakdown voltage  $V_B$  noted above and break-over voltage  $V_{B0}$  of bidirectional thyristor is set  
30 to be lower than breakdown voltage  $V_R$  of the equipment and higher than non-operation voltage  $V_A$ , that is,  $V_R > (V_B + V_{B0}) > V_A$ . When a lightning surge voltage is applied to the signal line so that the voltage thereon exceeds

( $V_B + V_{B0}$ ), the bidirectional voltage limiting element and bidirectional thyristor are both turned on to protect the equipment from the lightning surge. When the lightning surge voltage becomes lower than  $V_B$ , the bidirectional voltage limiting element and bidirectional thyristor are both turned off due to  $V_B > V_{Bf}$ . Since both the elements are turned off by the operation of the bidirectional voltage limiting element, the holding current of the bidirectional thyristor may be low, and it is possible to extremely reduce power consumed by the bidirectional thyristor and reduce size thereof.

Where a plurality of signal lines are connected to equipment, a series connection of a bidirectional voltage limiting element and a three-terminal bidirectional thyristor may be connected between each signal line and ground, with the gate terminals of the individual bidirectional thyristors connected together and held open without being connected to any other part. When the bidirectional voltage limiting element and bidirectional thyristor in one of the series connections in this structure are turned on with a lightning surge, the gate-cathode voltage on this thyristor is applied as a control signal to the gate terminals of the other bidirectional thyristors that are connected to the gate terminal noted above, so that these thyristors are also turned on. Thus, there is no possibility of generation of a transverse mode voltage.

According to another feature of the invention, a circuit consisting of a first bidirectional voltage limiting element, a three-terminal bidirectional thyristor connected in series with the first bidirectional voltage limiting element and a second bidirectional voltage limiting element connected between the gate and anode terminals of the bidirectional thyristor, is connected between a signal line

of communication equipment and ground. Breakdown voltage  $V_{B1}$  of the first bidirectional voltage limiting element is set to be slightly higher than battery feed voltage  $V_{Bf}$  on signal line. Also, sum  $(V_{B1} + V_{B2} + V_{GK})$  of that breakdown voltage  $V_{B1}$ , breakdown voltage  $V_{B2}$  of the second bidirectional voltage limiting element and gate-cathode voltage  $V_{GK}$  of the bidirectional thyristor, is set to be lower than breakdown voltage  $V_R$  of the equipment and higher than non-operation voltage  $V_A$ . Further, breakdown voltage  $V_{B2}$  is set lower than break-over voltage  $V_{BO}$  of the bidirectional thyristor. With this structure, when the voltage on the signal line exceeds  $(V_{B1} + V_{B2} + V_{GK})$  due to application of a lightning surge voltage to the signal line, both the first and second bidirectional voltage limiting elements are turned on to cause current to flow to the gate terminal of the bidirectional thyristor and turn it on, so that the equipment is protected from the lightning surge. When the lightning surge voltage becomes lower than  $V_{B1}$ , the first bidirectional voltage limiting element and bidirectional thyristor are turned off. Again in this case, the bidirectional thyristor may be such one that consumes low power. Where a plurality of signal lines are connected to equipment, the circuit consisting of the first and second bidirectional voltage limiting elements and three-terminal bidirectional thyristor may be connected between each signal line and ground, with the gates of the individual bidirectional thyristors connected together. With this arrangement, the generation of a transverse mode voltage can be prevented.

According to a further feature of the invention, a three-terminal bidirectional thyristor is connected between each of a plurality of signal lines of communication equipment and ground, a bidirectional voltage limiting element is

connected between the gate and anode terminals of each of these bidirectional thyristors, and the gate terminals of these bidirectional thyristors are connected together.

5 Holding current  $I_H$  of the bidirectional thyristors is set to be higher than battery feed current  $I_{BF}$  in the signal lines, and break-over voltage  $V_{BO}$  of the bidirectional thyristors is set to be higher than breakdown voltage  $V_B$  thereof. With this structure, when a bidirectional voltage limiting element is turned on by application of a lightning surge voltage to a signal line, current is caused to flow to the gate of the associated bidirectional thyristor and turn it on. At the same time, current is caused to flow to the gate terminals of the thyristors connected to the gate terminal noted above. The thyristors are turned off when 15 the current due to the lightning surge becomes lower than their holding current. It will thus be readily understood that the generation of a transverse mode voltage can be well prevented in comparison with the case where the gate terminals of thyristors are not connected to one another. 20 A resistor may be connected between the juncture of the bidirectional thyristor gate terminals and ground to control the holding current of the thyristors by appropriately selecting the resistance of the resistor.

In the above individual features of the invention, 25 in case where a commercial power line is connected to the communication equipment, application of a lightning surge voltage to the equipment may be prevented by connecting a three-terminal bidirectional thyristor between the commercial power line and ground and connecting the gate terminal of 30 this thyristor to the gate terminals of the bidirectional thyristors connected between the signal lines and ground. In this way, it is possible to prevent a transverse mode voltage from being generated between the commercial power

line and signal lines.

BRIEF DESCRIPTION OF THE DRAWINGS

5 Fig. 1 is a circuit diagram showing a prior art protector circuit used for an analog transmission system;

Fig. 2 is a circuit diagram showing a prior art protector circuit used for a digital transmission system;

Fig. 3 is a circuit diagram showing a prior art protector circuit using zener diodes and thyristors;

10 Fig. 4 is a circuit diagram showing a prior art protector circuit using thyristors operated with a high holding current;

Fig. 5 is a graph showing a current versus voltage characteristic of the circuit shown in Fig. 4;

15 Fig. 6 is a circuit diagram showing an embodiment of the protector circuit according to the invention where thyristors are turned on through break-over;

Fig. 7A is a graph showing a current versus voltage characteristic of the circuit shown in Fig. 6;

20 Fig. 7B is a graph showing a response characteristic of the circuit shown in Fig. 6;

Fig. 8 is a graph showing a capacitance versus surge withstanding capability relation of protector circuit;

25 Fig. 9 is a circuit diagram showing an example of application of the circuit of Fig. 6 to an equipment having two signal lines;

Fig. 10 is a circuit diagram showing an example of application of the circuit of Fig. 6 to an equipment having four signal lines;

30 Fig. 11 is a circuit diagram showing an embodiment of the protector circuit according to the invention where thyristors are turned on through gate control for blocking voltage;

Fig. 12 is a graph showing a lightning surge input response characteristic of the protector circuit shown in Fig. 11;

5 Fig. 13 is a circuit diagram showing an example of application of the circuit of Fig. 11 to an equipment having two signal lines;

Fig. 14 is a circuit diagram showing a further protector circuit according to the invention where gates of thyristors are controlled to turn on the thyristors;

10 Fig. 15 is a graph showing a lightning surge input response characteristic of the protector circuit shown in Fig. 14; and

15 Fig. 16 is a circuit diagram showing a further protector circuit according to the invention applied to an equipment having a signal line and a power line.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

20 Fig. 6 shows an embodiment of protector circuit according to the invention. Protector circuit 31 according to the invention is connected between signal line 12 leading from equipment 11, i.e., a communication equipment, and ground. Protector circuit 31 comprises bidirectional voltage limiting element 32 and two-terminal bidirectional thyristor 33 in series therewith. Bidirectional voltage  
25 limiting element 32 may be a bidirectional zener diode (avalanche diode), a varistor, etc. Bidirectional thyristor 33 may be a SSS (silicon symmetrical switch) element without any gate terminal. Or it may be a triac with an open gate terminal (i.e., with the gate terminal connected to nowhere).  
30 Bidirectional voltage limiting element 32 has breakdown voltage  $V_B$  slightly higher than battery feed voltage  $V_{Bf}$  on signal line 12. Sum ( $V_{B0} + V_B$ ) of break-over voltage  $V_{B0}$  of bidirectional thyristor 33 and breakdown voltage  $V_B$  noted

above is set to be lower than breakdown voltage  $V_R$  of equipment 11 but is higher than non-operation voltage  $V_A$ .

It is now assumed that  $V_B$  and  $V_{B0}$  are 35 V and 85 V, respectively. The voltage on signal line 12 is increased upon application of a lightning surge to the line. When the voltage reaches the sum of break-over voltage  $V_{B0}$  of bidirectional thyristor 33, i.e., 85 V, and breakdown voltage  $V_B$  of bidirectional voltage limiting element 32, i.e., 35 V, the sum being 120 V as shown by point 34 in Fig. 7A, bidirectional voltage limiting element 32 is turned on through breakdown, and bidirectional thyristor 33 is turned on through break-over. Once bidirectional voltage limiting element 32 is turned on, it is held at the fixed breakdown voltage  $V_B$ . However, operating voltage across the bidirectional thyristor 33 becomes  $V_{BO-ON}$  (1 to 3 V), a forward operating voltage of diode. The voltage between signal line 12 and ground, therefore, is reduced to the sum of these voltages, as shown at point 36, which is 36 to 39 V. Thus, it is possible to extremely reduce adverse effects of overvoltage on equipment 11. In addition, the voltage at point 35 will never become lower than battery feed voltage  $V_{Bf}$ . Thus, there is no possibility that overload protection function of a power supply system performs malfunction. Lightning surge current  $I_p$  is caused under this small voltage drop condition. Since the lightning surge current is 58 A in the average, when a lightning surge is approximated by a 1-msec. pulse, energy loss  $E$  in protector circuit 31 is given as

$$\begin{aligned}
 E &= \int_0^t V_{B0-ON} \cdot I_p dt + \int_0^t V_B \cdot I_p dt \\
 &= 3 \text{ (V)} \times 58 \text{ (A)} \times 10^{-3} \text{ (sec.)} + 35 \text{ (V)} \\
 &\quad \times 58 \text{ (A)} \times 10^{-3} \text{ (sec.)} \\
 &= 0.174 \text{ (J)} + 2.03 \text{ (J)} \\
 &= 2.2 \text{ (J)}
 \end{aligned}$$

5

Particularly, energy loss in bidirectional thyristor 33 is only 0.174 J. Therefore, bidirectional thyristor 33 may have as small chip area as about 4 mm, and also its capacitance  $C_T$  may be made as low as 50 pF.

10

15

With breakdown voltage  $V_B$  of bidirectional voltage limiting element 32 set to 35 V, which is slightly higher than supply voltage  $V_{Bf}$  of 30 V, the surge current can be reduced. In effect, when the voltage is reduced from point 36 to point 35, the continual current due to supplied power will vanish, thus turning off both bidirectional voltage limiting element 32 and bidirectional thyristor 33. Thus, a surge response characteristic as shown by plot 81 in Fig. 7B can be obtained. In the Figure, plot 82 shows the input surge, and plot 83 shows the response characteristic of the circuit shown in Fig. 1.

20

25

Referring to Fig. 7A, the shaded area on the right side of line 37 for  $V = V_{Bf}$  represents power consumed by bidirectional thyristor 33, while the shaded on the left side of line 37 represented power consumed by bidirectional voltage limiting element 32. Holding current  $I_H$  of bidirectional thyristor 33 thus can be reduced to reduce power consumption and hence size thereof. Further, bidirectional voltage limiting element 32 may have as small chip area as 5.6 mm, and also its capacitance  $C_Z$  may be made as low as 280 pF.

30

Capacitance  $C$  of the entire protector circuit, which is the series capacitance constituted by capacitances  $C_Z$  and  $C_T$  of bidirectional voltage limiting element 32 and bidirectional thyristor 33, may be as small as

5

$$C = \frac{C_T \cdot C_Z}{C_T + C_Z} = \frac{50 \times 280}{50 + 280} = 43 \text{ pF}$$

10 The protector circuit thus can be employed for high-speed, wide bandwidth communication purposes. With the protector circuit according to the invention the capacitance with respect to surge withstanding capability  $(10/1000)\mu\text{s}$  is as shown by plot 41 in Fig. 8, whereas with the prior art protector circuit shown in Fig. 1 it is so high as shown at point 43, roughly double the value according to the invention.

15

Further, according to the invention, unlike the case where a surge voltage is detected and the detection output is used to turn on thyristors, only two components are necessary in the structure of Fig. 6. In other words, according to the invention fewer components are needed compared to the prior art structure, that is, the construction is simpler and can be fabricated more inexpensively. Further, the circuit may be designed to comply with various different standards by suitably selecting breakdown voltage  $V_B$  and break-over voltage  $V_{BO}$ , that is, it has great freedom of design and permits approximation of ideal characteristics.

20

25

Further, unlike the case where a surge voltage is detected by a surge voltage detector and the output thereof is used to turn on thyristors, according to the invention the lightning surge voltage is applied directly to the thyristor. Thus, it is possible to quickly respond to the lightning surge voltage application and hold operating

30

voltage fluctuations within about 10 V, permitting operating voltage ( $V_B + V_{B0}$ ) to be 120 to 150 V inclusive of the manufacturing fluctuations. In the protector circuit shown in Fig. 1, the operating voltage fluctuates greatly from 120 to 195 V. With the protector circuit according to the invention with less fluctuations as noted above, it is possible to reduce the breakdown voltage of the LSI of equipment 11 (e.g., subscriber's circuit) from 320 V to 270 V and reduce the chip area of the LSI by about 20 %.

Further, zinc oxide varistors may be used for bidirectional voltage limiting element 32 to provide the protector circuit inexpensively. A zinc oxide varistor has a low voltage non-linearity index. The limit voltage, therefore, has dependency on the high input lightning surge voltage. Assuming the breakdown voltage  $V_B$  of the zinc oxide varistor to be 120 V, the limit voltage is increased to 195 V by application of a lightning surge with a peak of 15 kV. According to the invention, however, the bidirectional thyristor undergoes break-over to reduce voltage from  $V_{B0} + V_B$  to  $V_{B0-ON} + V_B$ , i.e., reduce by  $V_{B0} - V_{B0-ON}$ . Therefore, even if the breakdown voltage is increased to  $V_B + \delta$  with an increase of the lightning surge current, the limit voltage is substantially independent of the input surge voltage because  $\delta$  is lower than  $V_{B0} - V_{B0-ON}$ .

Further, according to this protector circuit, the continual current is cut by the bidirectional voltage limiting element. Therefore, the normal state, e.g., communication state, can be quickly restored after the lightning surge application, that is, the communication interruption period can be reduced. Furthermore, unlike the multi-stage protection circuit shown in Fig. 1, no resistor is connected in series with the signal line. It is thus possible to reduce transmission loss and increase transmission distance.

Where signal lines 12 and 13 connected to equipment 11 are return trip lines, series connection 47 of bidirectional voltage limiting element 45 and bidirectional thyristor 46 may be connected between signal line 13 and ground just like series connection 31 of bidirectional voltage limiting element 32 and bidirectional thyristor 33 is connected between signal line 12 and ground, as shown in Fig. 9. In this case, in order to prevent equipment 11 from rupture of operation which would be caused by application of a lightning surge through equipment 11 due to phase difference in the lightning surge on signal lines 12 and 13, the gate terminals of bidirectional thyristors 33 and 46 may be connected together by line 48. Line 48 is connected to no other part; that is, the gate terminals are held open. When bidirectional voltage limiting element 32 and bidirectional thyristor 33 are turned on by application of a lightning surge voltage to signal line 12, a voltage is generated between the gate and cathode terminals of bidirectional thyristor 33 due to current therein. This voltage is fed through line 48 to the gate terminal of the other bidirectional thyristor 46 to turn on this bidirectional thyristor 46. Thus, application of a lagging phase lightning surge voltage to signal line 13 will not result in the generation of any transverse mode voltage between signal lines 12 and 13, so that equipment 11 can be protected.

In the example of Fig. 9, fuses 15 and 18 are inserted in series in respective signal lines 12 and 13. With this arrangement, when a 200-V commercial power supply voltage appears between signal lines 12 and 13, the components of series connections 31 and 47 are turned on, and short-circuit of the components is caused by the resultant current therein so that equipment 11 is protected. But even if open-circuit of series connections 31 and 47 is caused, equipment 11 is protected by the disconnection of fuses 15

and 18.

Where equipment 11 is connected to input signal lines 12 and 13 and output signal lines 51 and 52 like a submarine repeater, series connections 31, 47, 53 and 54 each consisting of a bidirectional voltage limiting element and a bidirectional thyristor are each connected between each of signal lines 12, 13, 51 and 52 and ground as shown in Fig. 10. Further, to prevent generation of a transverse mode voltage between signal lines 12, 13, 51 and 52, gate terminals of the bidirectional thyristors in series connections 31, 47, 53 and 54 are connected to line 48, which is connected to no other part to hold the gate terminals open. Input signal lines 12 and 13 are connected to the input side of LSI repeater 57 through transformer 55 and impedance matching element 56. The output side of repeater 57 is connected to output signal lines 51 and 52 through transformer 58. Zener diode 59 is connected between a primary side center tap of transformer 55 and a secondary side center tap of transformer 58. The terminal voltage across zener diode 59 is applied as power source voltage to repeater 57.

In the above example of Fig. 10, each bidirectional thyristor is turned on through break-over by a lightning surge voltage. Alternatively, the gate terminal of the bidirectional thyristor may be controlled to turn on the thyristor. Fig. 11 shows such an example. In this example, a series connection of bidirectional voltage limiting element 61 and three-terminal bidirectional thyristor 62 is connected between signal line 12 and ground, and bidirectional voltage-limiting element 63 is connected between the gate and anode terminals of bidirectional thyristor 62. Bidirectional voltage limiting elements 61 and 63 and bidirectional thyristor 62 constitute protector circuit 64.  $\text{Sum } (V_{B1} +$

5  $V_{B2} + V_{GK}$ ) of breakdown voltages  $V_{B1}$  and  $V_{B2}$  of bidirectional voltage limiting elements 61 and 63 and gate-cathode voltage  $V_{GK}$  of bidirectional thyristor 62 is set to be lower than breakdown voltage  $V_R$  of equipment 11 and higher than non-operation voltage  $V_A$ . Breakdown voltage  $V_{B1}$  is set to be slightly higher than battery feed voltage  $V_{Bf}$  on signal line 12. Breakdown voltage  $V_{B2}$  is set to be lower than break-over voltage  $V_{B0}$  of bidirectional thyristor 62. Bidirectional voltage limiting elements 61 and 63 may be zener diodes, varistors, etc.

10 When a lightning surge voltage is applied to signal line 12, voltage limiting elements 61 and 63 are simultaneously turned on through breakdown. The current thus caused is fed to the gate terminal of bidirectional thyristor 62 to turn on the thyristor, whereby equipment 11 is protected against the lightning surge. When the lightning surge voltage is reduced to become lower than breakdown voltage  $V_{B1}$ , bidirectional voltage limiting element 61 is turned off to turn off bidirectional thyristor 62.

20 Now, the manner in which the lightning surge voltage applied to equipment 11 with time will be described with reference to Fig. 12, where it is assumed that bidirectional avalanche diodes are used for bidirectional voltage limiting elements 61 and 63 of protector circuit 64. In the absence of protector circuit 64 connected to signal line 12, the lightning surge voltage which is applied to equipment 11 becomes high as shown by dashed plot 50a to cause dielectric breakdown of equipment 11. With protector circuit 64 connected to signal line 12, as soon as the input lightning surge voltage reaches 150 V which is sum of breakdown voltages  $V_{B1}$  and  $V_{B2}$  of bidirectional avalanche diodes 61 and 63 and gate-cathode diffusion potential  $V_{GK}$  of bidirectional thyristor 62, current is caused through

these elements at this instant  $t_1$ . The voltage on signal line 12 thus is held at the constant voltage of 150 V, so that equipment is protected from the lightning surge.

5 This current constitutes the gate current to the bidirectional thyristor 62, and the thristor 62 is turned on at instant  $t_2$  approximately 0.9 sec. after instant  $t_1$ . With bidirectional thyristor 62 turned on, bidirectional avalanche diode 63 is turned off. That is, the "on" period of bidirectional avalanche diode 63 is as short as  
10 approximately 0.1 sec. With bidirectional thyristor 62 turned on, the voltage of protector circuit 64 is held at the sum of "on" voltage  $V_{ON}$  of bidirectional thyristor 61 (which is 1 to 3 V) and breakdown voltage  $V_{B1}$  of bidirectional avalanche diode 61. It will thus be seen that  
15 continual current may be cut by setting the sum voltage, i.e.,  $V_{ON} + V_{B1}$ , to be slightly higher than battery feed voltage  $V_{Bf}$ . In addition, in this case since the potential is varied only slightly even after the lightning surge application, the communication state can be quickly restored.

20 Now, energy loss in protector circuit 64 will be considered. Let it be assumed that a current of 50 A peak (i.e., lightning surge peak voltage of 5,000 V divided by signal line surge impedance of 100  $\Omega$ ) with a lightning surge waveform of 10/1,000  $\mu$ sec. flows on the circuit. The "on" period of bidirectional avalanche diode 63 is as short as  
25 about 0.1 sec., and energy loss caused in this element is about 0.1 mJ. The "on" voltage  $V_{ON}$  of bidirectional thyristor 62 is 1 to 3 V, and energy loss in this element is very low, i.e., less than 1 Joule. Thus, bidirectional  
30 thyristor 62 and bidirectional avalanche diode 63 can be realized with small chip area. Assuming breakdown voltage  $V_{B1}$  of bidirectional avalanche diode 61 to be 35 V, the flow of the lightning surge waveform noted above through

this element causes an energy loss of 1.75 J therein. The chip area, and hence the capacitance, of bidirectional avalanche diode 63 is large compared to the case of bidirectional thyristor 62 and bidirectional avalanche diode 63. However, since bidirectional avalanche diode 61 having the large capacitance is connected in series to the parallel connection of bidirectional avalanche diode 63 and bidirectional thyristor 62 each having small capacitance, the total capacitance of protector circuit 64 is small. The protector circuit thus can be used for high-speed, wide bandwidth communication as well. Further, since the lightning surge voltage is applied directly to bidirectional voltage limiting elements 61 and 63 and bidirectional thyristor 62 is turned on through the breakdown of elements 61 and 63, the lightning surge application can be quickly responded with the turning-on of bidirectional thyristor 62.

Where a plurality of signal lines are connected to equipment 11, protector circuits 64 and 65 may be connected between signal lines 12 and 13 and a grounding terminal, as shown in Fig. 13. Protector circuits 64 and 65 have the same construction. In this example, the gate terminals of bidirectional thyristors 62 of protector circuits 64 and 65 are connected together by line 48. Line 48 is connected to no other part to hold the gate terminals of bidirectional thyristors 62 and 66 open. In the case where a lightning surge is applied to either one of signal lines 12 and 13, it will be appreciated that the protector circuit of Fig. 13 can also protect equipment 11 in a similar manner explained with respect to the circuit shown in Fig. 11. In the case where a lightning surge is simultaneously applied to signal lines 12, 13, there would be no fear of applying an overvoltage to equipment 11 either between signal lines 12, 13 and ground or between signal lines 12 and 13. When a

lightning surge is applied to signal line 12 and also to signal line 13 with a time lag behind the former, for example, to turn on bidirectional voltage limiting elements 61, 63, the on-current at that moment flows into gates of both bidirectional thyristors 62, 66 to turn them on simultaneously, thus protecting equipment 11. Alternatively the turning on of bidirectional voltage limiting elements 61, 63 causes to turn on bidirectional thyristor 62 and the gate-cathode voltage of bidirectional thyristor 62 caused by the on-current thereof is applied across the gate and cathode of bidirectional thyristor 66 to turn it on. Since the time interval between the turn-on of thyristors 62 and 66 is extremely short, the protector circuit shown in Fig. 13 can protect equipment 11 from lightning surge voltages on signal lines 12, 13 having a phase difference therebetween, that is, from transverse mode voltage.

A construction as shown in Fig. 14 is also possible from the standpoint of quick operation, prevention of transverse mode voltage and simple construction. Signal lines 12 and 13 are grounded through respective bidirectional thyristors 68 and 69. Bidirectional voltage limiting elements 71 and 72 are connected between the gate and anode terminals of respective bidirectional thyristors 68 and 69. The gate terminals of bidirectional thyristors 68 and 69 are connected together by line 48. Line 48 is connected to no other part to hold the gate terminals open. Bidirectional voltage limiting elements 71 and 72 may be varistors, zener diodes, etc. Sum  $(V_B + V_{GK})$  of their breakdown voltage  $V_B$  and gate-cathode voltage  $V_{GK}$  of bidirectional thyristors 68 and 69 is set to be higher than breakdown voltage  $V_R$  of equipment 11, lower than non-operation voltage  $V_A$  and higher than break-over voltage  $V_{B0}$  of bidirectional thyristors 68 and 69, and may be, e.g., 150 V. Holding current  $I_H$  of

bidirectional thyristors 68 and 69 is set to be lower than battery feed current  $I_{Bf}$  of signal lines 12 and 13.

When a lightning surge voltage is applied with a phase difference to signal lines 12 and 13, e.g., first to signal line 13, bidirectional voltage limiting element 71 is turned on, causing current to flow to the gate terminals of bidirectional thyristors 68 and 69. Bidirectional thyristor 68, 69 are thus turned on. Accordingly, no transverse mode voltage is generated between signal lines 12 and 13. Even when only thyristor 68 is firstly turned on by the on-current of bidirectional voltage limiting element 71 flowing into the gate of thyristor 68, since the "on" voltage of bidirectional thyristor 68, which is 1 V, for instance, is sufficiently low comparing to breakdown voltage  $V_R$  of equipment 11, the equipment can be protected from lightning surge voltage. When the surge current becomes lower than holding current  $I_H$  of bidirectional thyristors 68 and 69 with decrease of the lightning surge voltage, both bidirectional thyristors 68 and 69 are turned off.

If holding current  $I_H$  of bidirectional thyristors 68 and 69 is lower than battery feed current  $I_{Bf}$ , bidirectional thyristors 68 and 69 remain "on" even after the disappearance of the lightning surge. To solve this problem, line 48 may be grounded through resistor 73 as shown by dashed line. The holding current of bidirectional thyristors 68 and 69 is increased by reducing the resistance of resistor 73.

Fig. 15 shows the manner in which the voltage on the input side of equipment 11 varies with lightning surge input to the protector circuit shown in Fig. 14. When the sum of breakdown voltage  $V_B$  of bidirectional avalanche diode 71 and gate-cathode voltage  $V_{GK}$  of bidirectional thyristor 68, i.e., 150 V, is reached at instant  $t_1$  with lightning surge voltage application to signal line 12, bidirectional

avalanche diode 71 is turned on, so that signal line 12 is held at that voltage. At subsequent instant  $t_2$  after the lapse of a slight period, e.g., about 0.8 sec., bidirectional thyristor 68 is turned on. Signal line 12 now is held at "on" voltage  $V_{ON}$  (i.e., 1 to 3 V) of bidirectional thyristor 68. Since holding current  $I_H$  of bidirectional thyristor 68 is higher than that of bidirectional thyristor 62 shown in Fig. 11, the time required until this thyristor is turned on is extended, and the conduction period of bidirectional avalanche diode 71 (between instants  $t_1$  and  $t_2$ ) is 0.8  $\mu$ m. The energy loss in this protector circuit is very low, i.e., 1 mJ and 1 J in bidirectional avalanche diode 71 and bidirectional thyristor 68, respectively, with a lightning surge waveform of 10/1,000  $\mu$ sec. and a peak current of 50 A as in the previous case. Thus, bidirectional thyristor 68 and bidirectional avalanche diode 71 can be realized with small chip areas to reduce the capacitance between signal line 12 and ground and permit use of the protector circuit for high-speed wide-bandwidth communication. Further, both bidirectional avalanche diode 71 and bidirectional thyristor 68 can be fabricated in the same process and permit size reduction and density increase.

Where a series connection of a bidirectional thyristor and a bidirectional voltage limiting element is connected between each of signal lines and ground and the gate terminals of the individual bidirectional thyristors are connected together as shown in Figs. 9, 10 and 13, the bidirectional thyristors are preferably provided on the ground side with respect to the bidirectional voltage limiting elements. Although the bidirectional voltage limiting elements may be provided on the ground side, in this case the mutually connected bidirectional thyristors

may fail to be turned on simultaneously if the fluctuations of the breakdown voltages of the bidirectional voltage limiting elements are excessive.

5        In case of equipment 11 using a commercial power supply such as a facsimile apparatus, equipment 11 may be connected to commercial power lines (not shown) through connector 84, as shown in Fig. 16. In this case, a lightning surge is applied to equipment 11 via signal line 12 and also via power line. Since the signal line and power line are  
10        laid along different routes, lightning surge reaches equipment 11 with different waveforms and at different phases via the signal line and power line, respectively. That is, a transverse mode voltage is generated between the signal line and power line. Accordingly, power lines 85 and 86  
15        connected to connector 84 of equipment 11 are grounded through respective bidirectional voltage limiting elements 87 and 88 and then through common bidirectional thyristor 89. The gate terminal of bidirectional thyristor 89 in the power supply side protector circuit and the gate terminal  
20        of bidirectional thyristor 33 in protector circuit 31 on the side of signal line 12 are connected together with line 91. It will be understood that with this arrangement no transverse mode voltage will be applied across equipment 11 in the events of a lightning surge applied to signal line  
25        and also that applied to power line. The connection point between bidirectional voltage limiting elements 87 and 88 is connected to a primary center tap of a transformer of equipment 11.

30        Similar connections may be used in the other protector circuits according to the invention so long as commercial power lines are connected to equipment 11, as shown by dashed lines in Figs. 13 and 14, for instance.

## CLAIMS:

1. A protector circuit for protecting a communication equipment from a surge voltage applied to at least one signal line connected to said equipment by a turning-on of a  
5 voltage limiting means and a thyristor means connected in series with each other between said signal line and ground, characterized in that:

said voltage limiting means is a bidirectional voltage limiting element;

10 said thyristor means is a two-terminal bidirectional thyristor; and

the breakdown voltage  $V_B$  of said bidirectional voltage limiting element is slightly higher than the battery feed voltage  $V_{Bf}$  on said signal line, and the sum of said  
15 breakdown voltage  $V_B$  and said break-over voltage  $V_{BO}$  of said bidirectional thyristor is lower than the breakdown voltage  $V_R$  of said equipment and higher than the non-operation voltage  $V_A$ .

20 2. The protector circuit according to claim 1, characterized in that:

a plurality of signal lines are connected to said equipment, said series connection of the bidirectional voltage limiting element and bidirectional thyristor is  
25 connected between each said signal line and ground, said individual bidirectional thyristors having respective gate terminals connected together and held open without being connected to any other part.

30 3. A protector circuit for protecting a communication equipment from a surge voltage applied to one of a plurality of signal lines connected to said equipment by a turning-on

of a thyristor means connected between said signal line and ground, characterized in that:

said thyristor means is a bidirectional thyristor;  
a first bidirectional voltage limiting element is  
5 connected in series with said bidirectional thyristor, a  
second bidirectional voltage limiting element is connected  
between the gate and anode terminals of said bidirectional  
thyristor, the gate terminals of said second bidirectional  
voltage limiting elements are connected together and held  
10 open without being connected to any other part, the break-  
down voltage  $V_{B1}$  of said first bidirectional voltage limiting  
element is slightly higher than the battery feed voltage  
 $V_{Bf}$  on said signal line, the sum of said breakdown voltage  
 $V_{B1}$ , the breakdown voltage  $V_{B2}$  of said second bidirectional  
15 voltage limiting element and the gate-cathode voltage  $V_{GK}$   
of said bidirectional thyristor is lower than the breakdown  
voltage  $V_R$  of said equipment and higher than the non-  
operation voltage  $V_A$ , and the break-over voltage  $V_{B0}$  of said  
bidirectional thyristor is higher than the breakdown voltage  
20  $V_{B2}$ .

4. The protector circuit according to claim 3,  
characterized in that:

said bidirectional thyristor is provided on the ground  
25 side with respect to said bidirectional voltage limiting  
element.

5. A protector circuit for protecting a communication  
equipment from a surge voltage applied to one of a plurality  
30 of signal lines connected to said equipment by a turning-on  
of a thyristor means connected between said signal line and  
ground, characterized in that:

said thyristor means is a three-terminal bidirectional

thyristor;

a bidirectional voltage limiting element is connected between the gate and anode terminals of each of said bidirectional thyristors, the gate terminals of said  
5 bidirectional voltage limiting elements are connected together and held open without being connected to any other part, the holding current of each said bidirectional thyristors is higher than the battery feed current to said signal line, the break-over voltage  $V_{BO}$  of said bidirectional  
10 thyristor is higher than the breakdown voltage  $V_B$  of said bidirectional voltage limiting element, and the sum of said breakdown voltage  $V_B$  and the gate-cathode voltage  $V_{GK}$  of said bidirectional thyristor is lower than the breakdown voltage  $V_R$  of said equipment and higher than said non-  
15 operation voltage  $V_A$ .

6. The protector circuit according to claim 5, characterized in that:

the gate terminals of said bidirectional thyristors  
20 are grounded through a common resistor.

7. The protector circuit according to claim 1, characterized in that:

each said bidirectional thyristor has a gate terminal,  
25 a commercial power line is connected to said equipment, a second three-terminal bidirectional thyristor is connected between said commercial power line and ground, and the gate terminal of said second three-terminal bidirectional thyristor and the gate terminal of said bidirectional thyristor  
30 are connected together without being connected to any other part.

8. The protector circuit according to claim 2, 3 or 5, characterized in that:

a commercial power line is connected to said equipment,  
a second three-terminal bidirectional thyristor is connected  
5 between said commercial power line and ground, and the gate  
terminal of said second three-terminal bidirectional thyristor  
and the gate terminal of said bidirectional thyristor are  
connected together.

10

15

20

25

30

35

FIG. 1 PRIOR ART

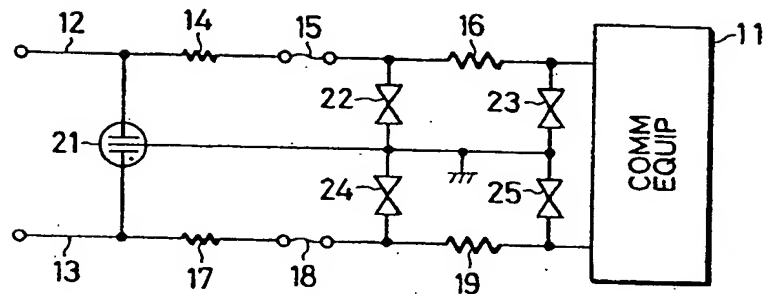


FIG. 2 PRIOR ART

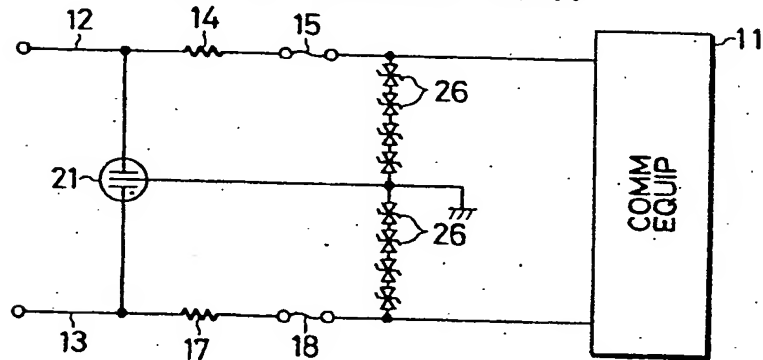


FIG. 3 PRIOR ART

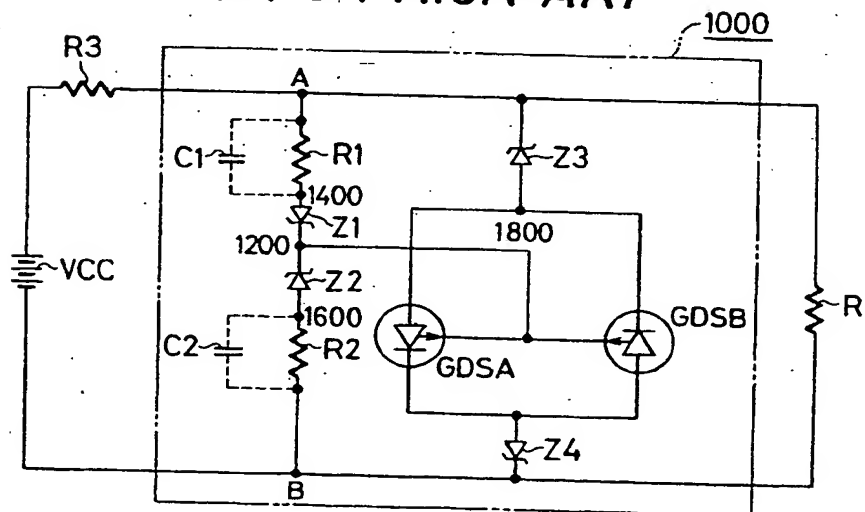


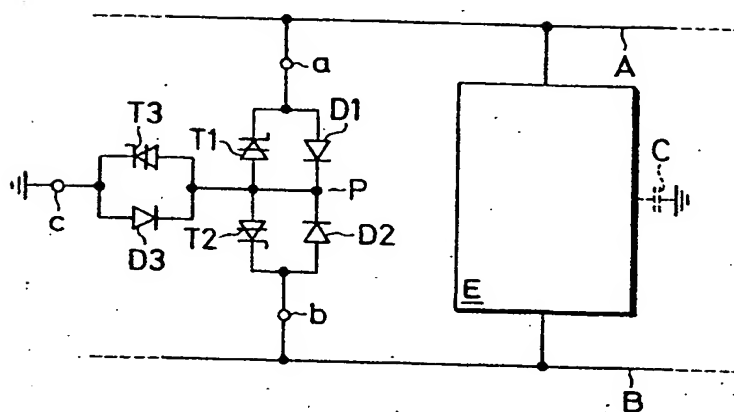
FIG. 4  
PRIOR ART

FIG. 5

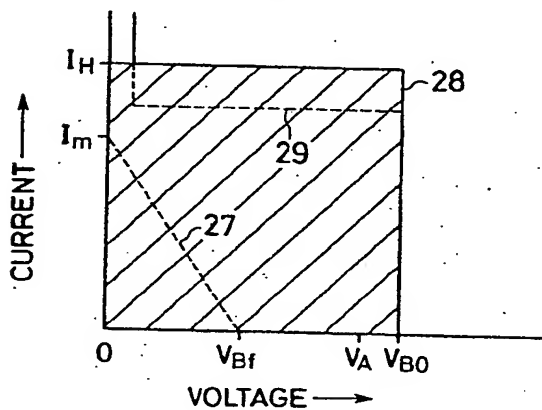


FIG. 6

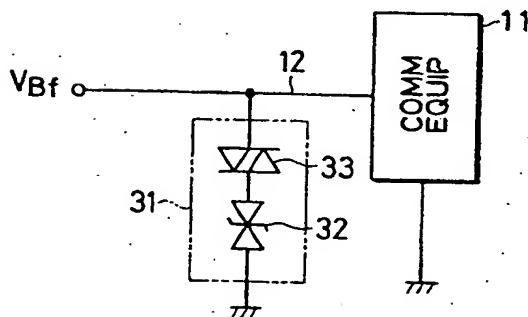


FIG. 7A

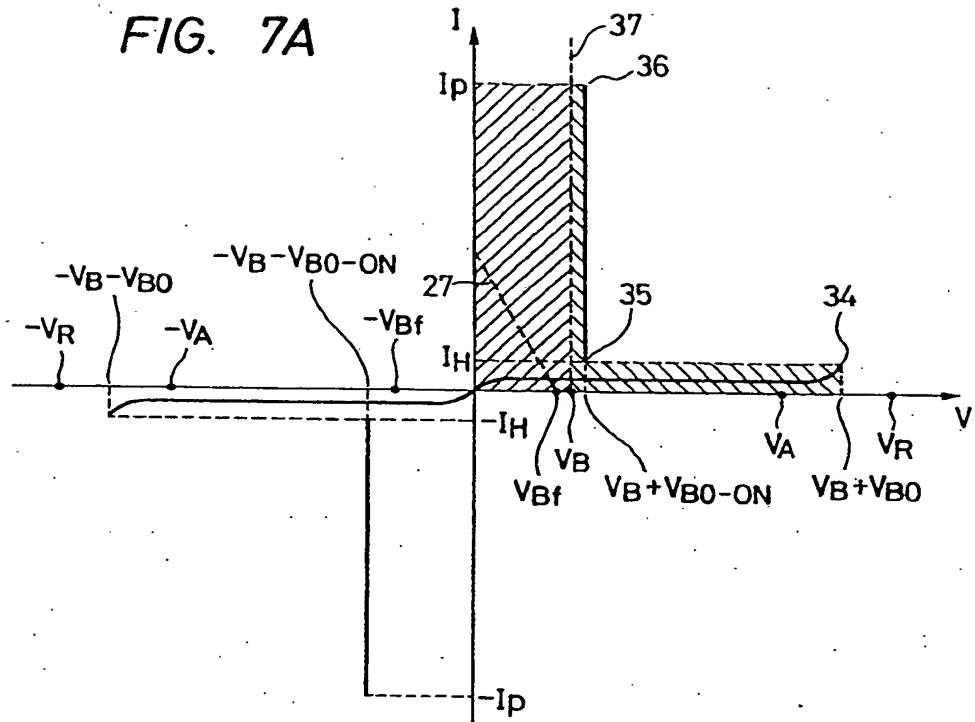


FIG. 7B

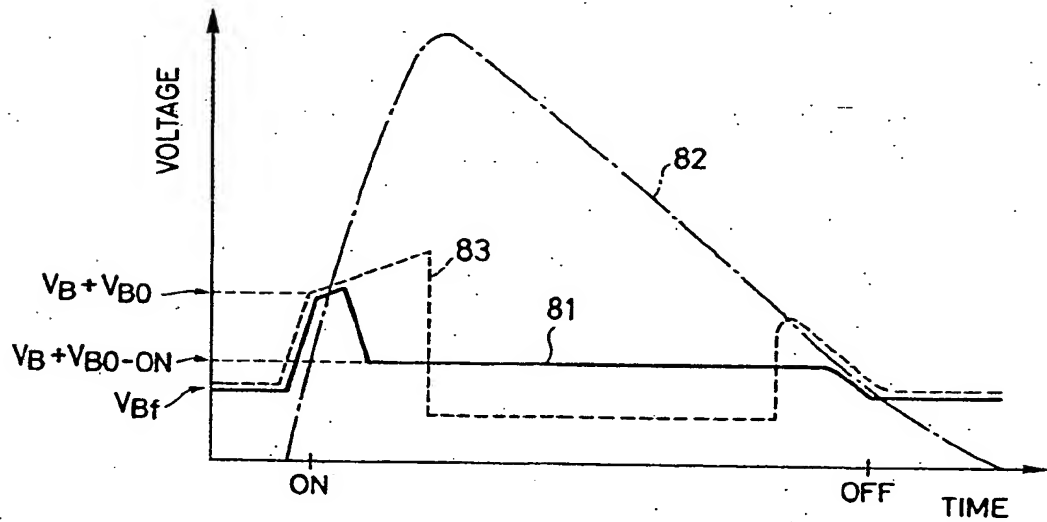


FIG. 8

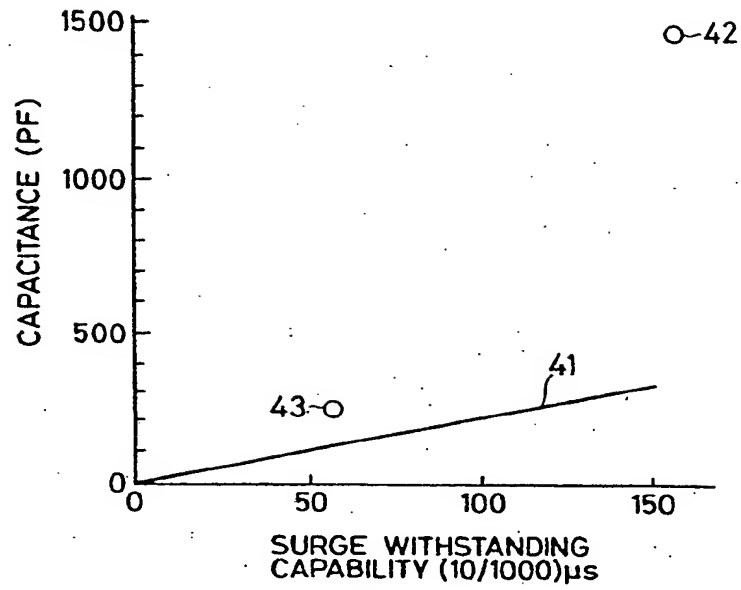


FIG. 9

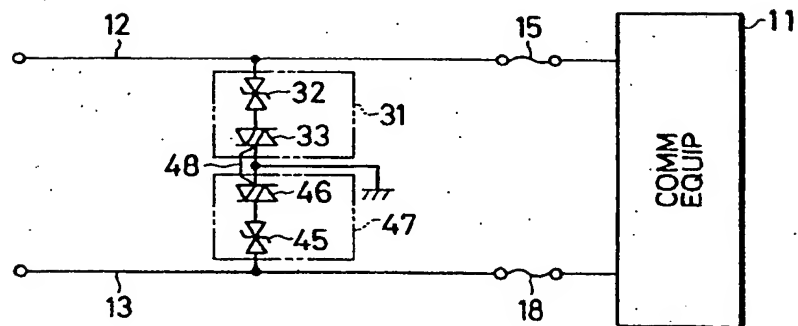


FIG. 10

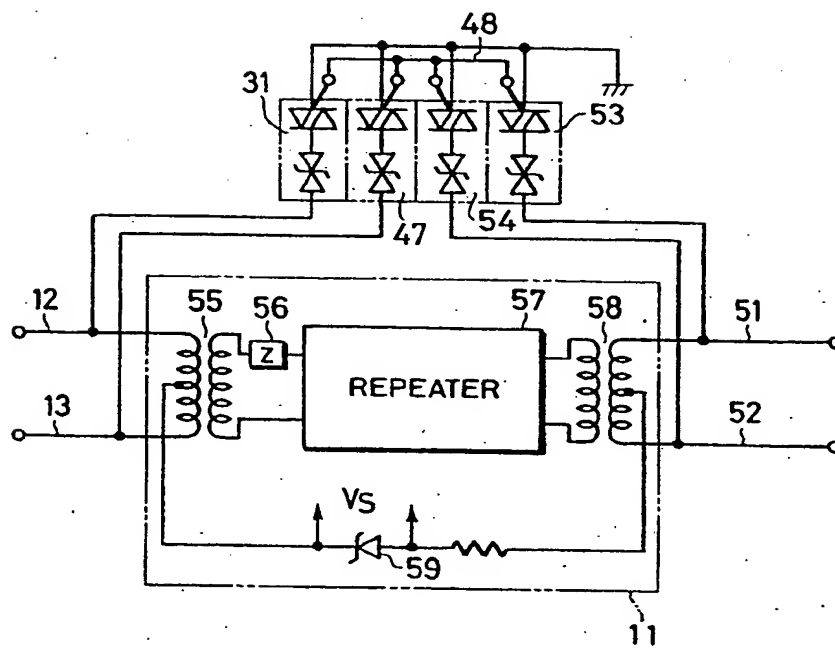


FIG. 11

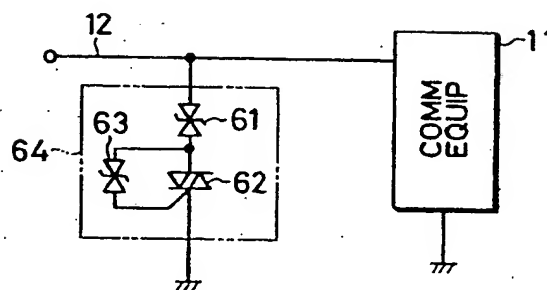


FIG. 12

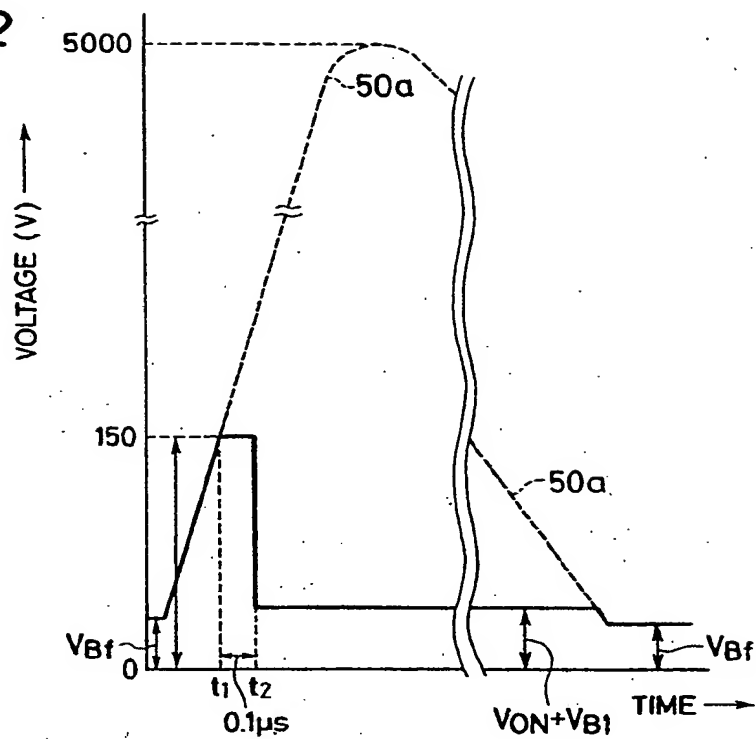


FIG. 13

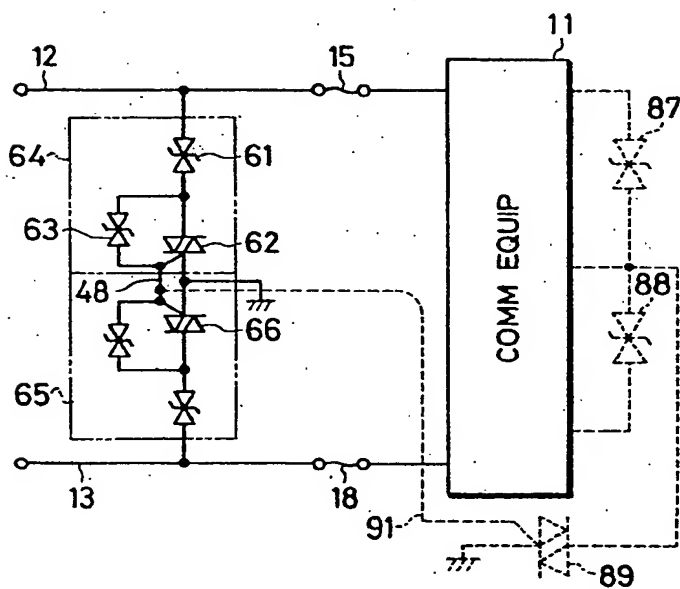


FIG. 14

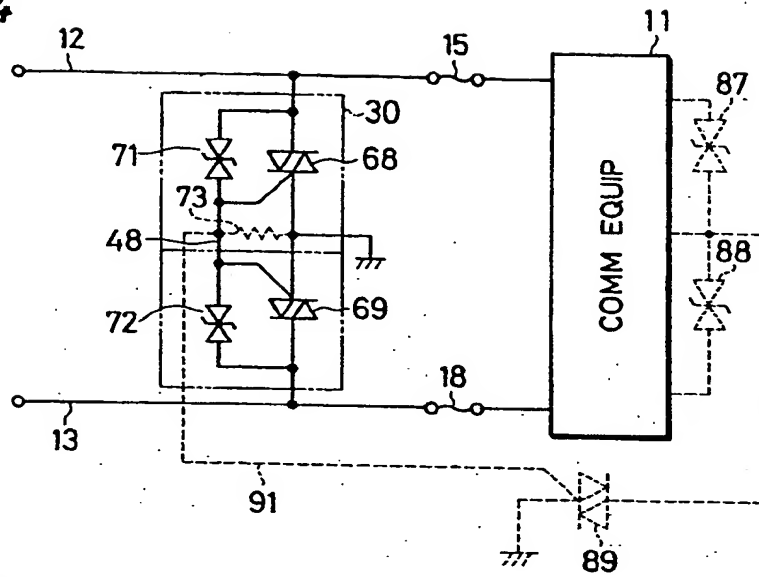


FIG. 15

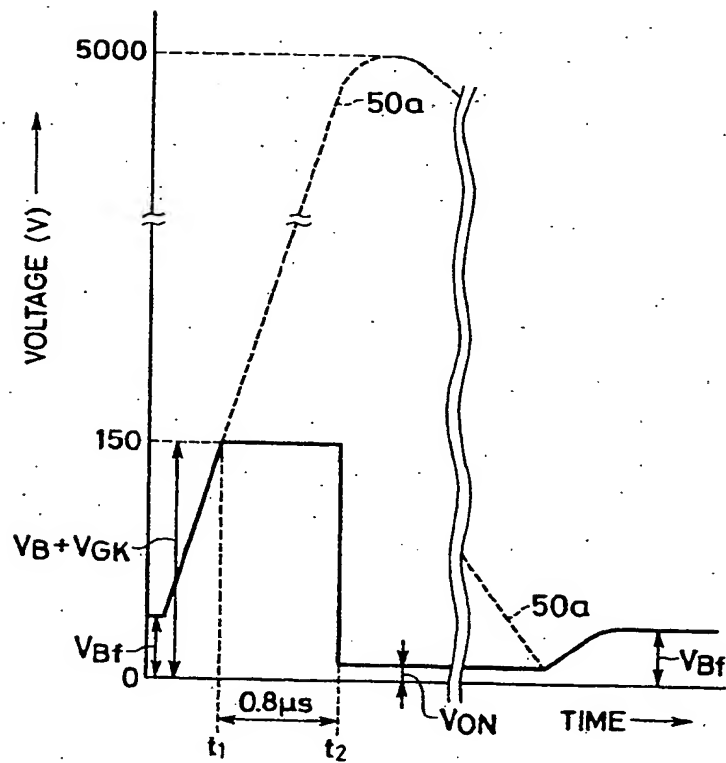


FIG. 16

